

УДК 535.16:534.341

## ТЕРМООПТИЧЕСКОЕ ВОЗБУЖДЕНИЕ ЗВУКА БЕССЕЛЕВЫМИ СВЕТОВЫМИ ПУЧКАМИ В СЛОИСТЫХ СРЕДАХ С ВНУТРЕННИМИ НАПРЯЖЕНИЯМИ

Г.С. Митюрин<sup>1,2</sup>, Е.В. Лебедева<sup>2</sup>, М. Алексиук<sup>3</sup>, А.Н. Сердюков<sup>1</sup>

<sup>1</sup>Гомельский государственный университет им. Ф. Скорины

<sup>2</sup>Белорусский торгово-экономический университет потребительской кооперации, Гомель

<sup>3</sup>Институт фундаментальных технологических исследований Польской академии наук, Варшава

## THERMOOPTICAL EXCITATION OF SOUND BY BESSEL LIGHT BEAMS IN LAYERED MEDIA WITH INTERNAL STRESS

G.S. Mityurich<sup>1,2</sup>, E.V. Lebedeva<sup>2</sup>, M. Aleksiejuk<sup>3</sup>, A.N. Serdyukov<sup>1</sup>

<sup>1</sup>F. Scorina Gomel State University

<sup>2</sup>Belarusian Trade and Economics University of Consumer Cooperatives, Gomel

<sup>3</sup>Institute of Fundamental Technological Research Polish Academy of Sciences, Warsaw

Представлены результаты исследования фотоакустического преобразования различных мод БСП в гиротропных слоистых средах при пьезоэлектрическом методе регистрации результирующего сигнала. Показано, что амплитуда фотоакустического сигнала определяется теплофизическими характеристиками слоистых сред с внутренними напряжениями, коэффициентом поглощения и параметром кругового дихроизма гиротропных слоистых сред, поляризацией и энергетическими характеристиками БСП, частотой амплитудной модуляции, а также геометрией системы «пьезоэлектрический датчик – гиротропный слоистый образец».

**Ключевые слова:** фотоакустическое преобразование, пьезоэлектрическая спектроскопия, бесселев световой пучок, диссипация энергии, функция Бесселя, уравнение теплопроводности, гиротропная слоистая среда, константы Мурнагана, коэффициенты Ламэ.

The results of investigation of photoacoustic transformation of different modes BLB in gyrotropic layered media are submitted at piezoelectric detection method of registration of a resulting signal. Following the obtained expressions, it is showed that the amplitude of a photoacoustic signal is determined by the thermophysical characteristics of layered media with internal stress, absorption coefficient and parameter of circular dichroism of gyrotropic layered media, polarization and energy characteristics of BLB, frequency of amplitude modulation, and also by geometry system piezoelectric sensor – gyrotropic layered sample.

**Keywords:** photoacoustic transformation, piezoelectric spectroscopy, Bessel light beam, energy dissipation, Bessel function, heat equation, gyrotropic layered media, Murnaghan constants, Lamé coefficients.

### Introduction

The research of the mechanism of photoacoustic transformation at Bessel light beams (BLB) uptake in media with spatial dispersion is interesting from both practical and theoretical points of view. The relevant feature of BLB is the absence of diffraction divergence during their distribution. Taking that fact that natural layered gyrotropic media are widely used in quantum electronics, linear and nonlinear optics, in items of nanotechnologies, analysis of a broad spectrum of physical, acoustics, thermal etc. properties in such media is very actual.

### 1 Method

One of the most important line of the development of modern methods of nondestructive testing and diagnostic facilities is connected with the detection of mechanical stresses in solids. A range of methods has been developed and is being applied for the solution of this problem at present. The most important of them are as follows: ultrasound, diffraction, magnetic, and photothermoacoustic, as well

as methods based on the use of holographic interferometry. However, great attention has been recently paid to the possibility of the use of photothermoelastic effect for the diagnostics of mechanical stresses in solids [1]–[6]. An important advantage of the photothermoelastic method is its possibility to research different objects such as, for example, gyrotropic [7] and nonlinear [8] crystals, layered [9] and inhomogeneous media [10], different classes of piezo crystals symmetry [11] and so on.

Let's note that the paper [5] studied the resonant photoacoustic phenomena in mechanically stressed solids, taking into account the dependence of the thermoelastic coupling coefficient on the initial deformation in an isotropic sample upon irradiation him monochromatic plane electromagnetic waves.

Bessel light beams attract attention of researches due to their unique properties i.e. non-diffraction propagation in definite region of space, as well as the ability of high concentration of light energy nearby an axis of beam [12]–[14]. The important

feature of Bessel light beams is the existence of radial energy flux. The use of opportunity to manage the choice of necessary polarized modes of BLB let us to propose a device [15] of thermo-optical excitation of acoustic waves with the aim to develop the method of photoacoustic diagnostics of different media and materials.

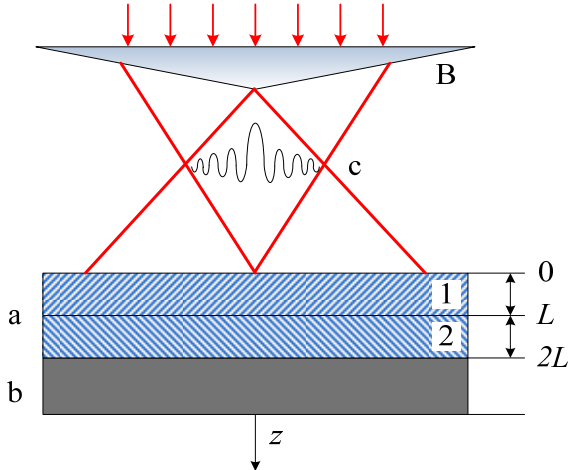


Figure 1.1. – Schematic of detection of a photoacoustic signal: (a) – sample (1) gyrotropic-isotropic layer, (2) isotropic layer; (b) piezoelectric cell, (B) conical lens, (C) modes Bessel light beams

This paper aims at studying the resonant photoacoustic transformation in a two-layer gyrotropic medium under generation of a thermoelastic signal by TE-mode of BLB (Bessel light beam). Detection of the signal is carried out using piezoelectric transducer, in the geometry shown in Figure 1.1.

## 2 Results

The research of photoacoustic transformation of TE-modes of BLB in multilayer will be described by means of material equations and Maxwell's equations.

The properties of a gyrotropic sample will be described with the use of coupling equations [16]

$$\begin{aligned} \mathbf{D} &= \varepsilon \varepsilon_0 \mathbf{E} + i\eta \sqrt{\varepsilon_0 \mu_0} \mathbf{H}, \\ \mathbf{B} &= \mu \mu_0 \mathbf{H} - i\tilde{\eta} \sqrt{\varepsilon_0 \mu_0} \mathbf{E}, \end{aligned} \quad (2.1)$$

where and  $\mu_0 = 4\pi \cdot 10^{-7} \text{ H} \cdot \text{m}^{-1}$  are electric and magnetic constants respectively,  $\mu$  is magnetic medium permittivity,  $\mu = 1$  – it is assumed that the medium is nonmagnetic, the sign ‘ $\sim$ ’ is used to denote transposition,  $\eta$  is a pseudoscalar complex parameter of gyrotropy, and the real part  $\text{Re } \eta = \eta_1$  defines specific rotation of the plane of polarization, and the imaginary part  $\text{Im } \eta = \eta_2$  is responsible for circular dichroism.

The energy dissipation in the gyrotropic sample can be found basing on (2.1) and Maxwell equations and can write down as follows

$$\tilde{Q}^{TE} = \tilde{Q}^{TE} e^{-2k_{z2}z},$$

$$\begin{aligned} \tilde{Q}^{TE} &= \frac{\omega |\varepsilon| \varepsilon_2 \varepsilon_0}{2\pi} \left( \left( \frac{m}{q\rho} \right)^2 J_m^2(q\rho) + J_m'^2(q\rho) + \right. \\ &\quad \left. + \frac{2mk_0 k_{z1} \eta_2}{q^3 \rho} J_m(q\rho) J_m'(q\rho) \right), \end{aligned}$$

where  $k_0 = \omega/c$ ,  $\varepsilon$  is the medium permittivity,  $\rho$  is a radial coordinate,  $q = k_0 \sqrt{\varepsilon} \sin(\gamma)$ ,  $k_{z1} = k_0 \sqrt{\varepsilon_1} \cos(\gamma_1)$ ,  $k_{z2} = k_0 \sqrt{\varepsilon_2} \cos(\gamma_2)$ ,  $\varepsilon_1 = \varepsilon_1' + i\varepsilon_1''$  is a complex permittivity of the gyrotropic-isotropic layer,  $\varepsilon_2 = \varepsilon_2' + i\varepsilon_2''$  is the complex permittivity of the second isotropic layer,  $\gamma_1$  и  $\gamma_2$  are conicity parameters of BLB in the first and the second layer, which is equal to the half apex angle of the cone of the wave vectors that define the spatial frequency spectrum of the beam,  $\omega_0$  is the frequency of light,  $\omega$  is the frequency of amplitude modulation of BLB,  $J_m(q\rho)$  is a m-order Bessel function of the first kind,  $J_m'(q\rho) = \partial J_m(q\rho) / \partial \rho$ .

Basing on the formerly used method in [5] we obtain the expression for the photoacoustic (PA) response from the piezoelectric transducer under generation of a thermoelastic signal in the layered medium (here, a double layer) of BLB when the boundaries are free:

$$V = \frac{\left( \begin{aligned} &iY_u(2L) \times \\ &\times (c_u^T Q_u 2 \cos(Q_z L) - c_z^T Q_z 2i \sin(Q_z L)) - \\ &- iX_1 (c_u^T Q_u 2 \cos(Q_z L) - c_z^T Q_z 2i \sin(Q_z L)) - \\ &- c_u^T C e^{iQ_z L} \end{aligned} \right) \times}{\left( \begin{aligned} &c_u^T (e^{i2k_1 L} + 1) \times \\ &\times (c_u^T iQ_u 2 \cos(Q_z L) - c_z^T iQ_z 2i \sin(Q_z L)) + \\ &+ c^D k_1 (1 - e^{i2k_1 L}) \times \\ &\times (c_u^T Q_u 2 \cos(Q_z L) - c_z^T Q_z 2i \sin(Q_z L)) \\ &\times (2e^{ik_1 L} - e^{ik_1 2L} - 1) \end{aligned} \right)}$$

with the following designations:

$$\begin{aligned} X_0 &= c_z^T \frac{\partial Y_z(z)}{\partial z} \Big|_{z=0} - B_z \alpha_{tz} T_z(0), \\ X_1 &= c_u^T \frac{\partial Y_u(z)}{\partial z} \Big|_{z=2L} - B_u \alpha_{tu} T_u(2L), \\ X_2 &= Y_z(L) - Y_u(L), \\ X_3 &= \left( c_z^T \frac{\partial Y_z(z)}{\partial z} \Big|_{z=L} - c_u^T \frac{\partial Y_u(z)}{\partial z} \Big|_{z=L} + \right. \\ &\quad \left. + B_u \alpha_{tu} T_u(L) - B_z \alpha_{tz} T_z(L) \right), \\ C &= c_u^T (X_3 - X_0 e^{iQ_z L}) (e^{-iQ_z L} + e^{iQ_z L}) + \\ &\quad + (e^{iQ_z L} X_0 - c_z^T iQ_z X_2) (e^{iQ_z L} - e^{-iQ_z L}), \\ T_z(z) &= B_1 e^{-\sigma z} + B_2 e^{\sigma z} + \psi_z e^{-2k_{z2}z}, \\ T_u(z) &= B_3 e^{-\sigma z} + \psi_u e^{-2k_{z2}z}, \end{aligned}$$

$$\begin{aligned}
 B_1 &= \frac{(\phi_1 + \sigma\phi_2)e^{-\sigma L} - 4k_{z2z}\psi_z}{2\sigma}, \\
 B_2 &= \frac{(\phi_1 + \sigma\phi_2)e^{-\sigma L}}{2\sigma}, \\
 B_3 &= \frac{(\phi_1 + \sigma\phi_2)(e^{-\sigma L} + e^{\sigma L}) - 4k_{z2z}\psi_z - \phi_2 e^{\sigma L}}{2\sigma}, \\
 \psi_z &= \frac{\tilde{Q}_z^{TE}}{2k_{sz}(\sigma^2 - 4k_{z2z}^2)}, \quad \psi_u = \frac{\tilde{Q}_u^{TE}}{2k_{su}(\sigma^2 - 4k_{z2u}^2)}, \\
 \sigma &= \sqrt{\frac{i\omega}{\beta}}, \\
 \phi_1 &= (2k_{z2z}\psi_z e^{-2k_{z2z}L} - 2k_{z2u}\psi_u e^{-2k_{z2u}L}), \\
 \phi_2 &= (\psi_u e^{-2k_{z2u}L} - \psi_z e^{-2k_{z2z}L}), \\
 Y_z(z) &= Y_1 e^{-\sigma z} + Y_2 e^{\sigma z} + Y_3 e^{-2k_{z2z}z}, \\
 Y_u(z) &= Y_4 e^{-\sigma z} + Y_5 e^{-2k_{z2u}z}, \\
 Y_1 &= -\frac{g^{(3)z}\sigma B_1}{G_{3z}^{(3)}(\sigma^2 + Q_z^2)}, \quad Y_2 = \frac{g^{(3)z}\sigma B_2}{G_{3z}^{(3)}(\sigma^2 + Q_z^2)}, \\
 Y_3 &= -\frac{g^{(3)z}2k_{z2z}}{G_{3z}^{(3)}(4k_{z2z}^2 + Q_z^2)}, \quad Y_4 = -\frac{g^{(3)u}\sigma B_3}{G_{3u}^{(3)}(\sigma^2 + Q_z^2)}, \\
 Y_5 &= -\frac{g^{(3)u}2k_{z2u}}{G_{3u}^{(3)}(4k_{z2u}^2 + Q_u^2)}, \\
 Q_z^2 &= \frac{\rho_{0z}\omega^2}{G_{3z}^{(3)}}, \quad Q_u^2 = \frac{\rho_{0u}\omega^2}{G_{3u}^{(3)}}, \\
 G_3^{(3)} &= t_{33}^{(0)} + b + 2(n + m_0)U_{33} + C_{33}, \\
 b &= 2\mu + (2m - n)U_{33}, \\
 C_{33} &= K - \frac{2}{3}\mu + 2L_0U_{33}, \quad g^{(3)} = (1 + 9U_{33})\gamma_0,
 \end{aligned}$$

$\rho_0$  is the sample density at the initial instant;  $\mathcal{G}$  is the coefficient determining the dependence of the thermoelastic coupling on the initial strain;  $\gamma_0$  is the thermoelastic coupling coefficient for the unstrained sample;  $K$  is the compressibility;  $m_0$ ,  $n$ ,  $L_0$  are the Murnaghan constants;  $U_{33}$  is a component of the initial deformation vector;  $t_{33}^{(0)}$  is a component of the

initial stress tensor;  $h = e/\epsilon^s$ ;  $e$  is a piezoelectric modulus;  $\epsilon^s$  is the permittivity of clamped crystal;  $c^D = c^E(1 + e^2/(\epsilon^s c^E))$ ;  $c^E$  is the coefficient of piezoelectric stiffness;  $c^T = \lambda + 2\mu$ ,  $\lambda$  and  $\mu$  are the Lamé coefficients;  $B$  is the bulk elasticity modulus;  $\alpha_t$  is the coefficient of thermal volume expansion;  $k_s$  is the thermal conductivity;  $\beta$  is the thermal diffusivity; index  $z$  corresponds to the gyrotropic-isotropic layer; index  $u$  corresponds to the isotropic layer.

For the simplicity of further calculations, let us choose the media under consideration such that they have approximately identical thermophysical parameters.

### 3 Graphical analysis

As seen from the graphs (Figure 3.1), for TE mode of the function  $Q^{TE}(\rho)$  for BLB<sub>0</sub> and oscillate nearly in antiphase. This peculiarity is conditioned by the out-of-phase component  $S_\phi^{TE}$ .

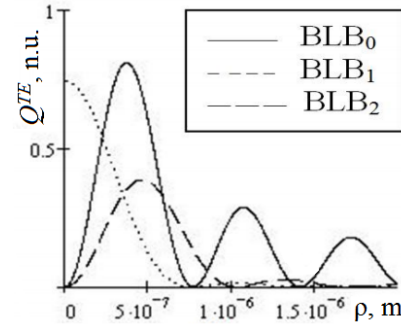


Figure 3.1. – Radial distribution of the energy dissipation  $Q^{TE}(\rho)$  for different BLB

Change the shape of the graphs for  $Q^{TE}(\rho)$  at BLB<sub>1</sub> and BLB<sub>2</sub> of TE-polarization occurs as a result of the combined influence of the two factors: the emergence of the azimuthal energy flux  $S_\phi^{TE}$  and the absence of the radial flow  $S_\rho^{TE}$  that determine the diffraction spreading of a light beam near of paraxial area.

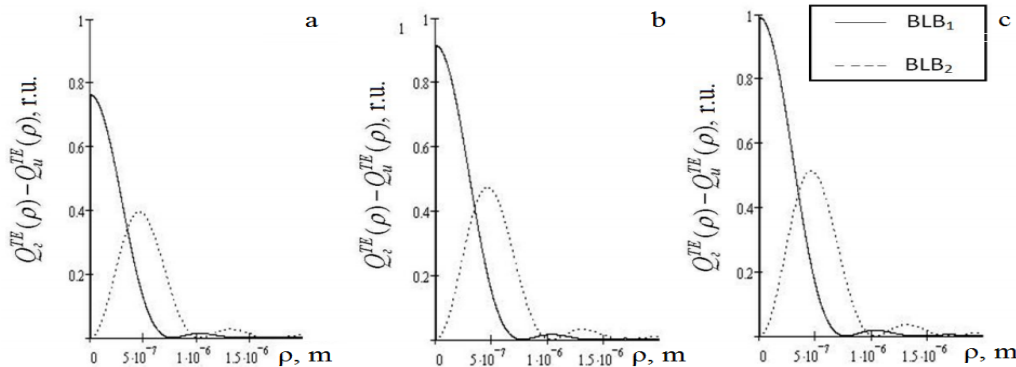


Figure 3.2. – Dependence of the difference of energy dissipation from the  $\rho$  as the parameter of gyrotropy  $\eta_2$   $Q_z^{TE}(\rho)$  and  $Q_u^{TE}(\rho)$ : (a)  $\eta_2 = 10^{-5}$ ; (b)  $\eta_2 = 1.2 \cdot 10^{-5}$ ; (c)  $\eta_2 = 1.3 \cdot 10^{-5}$

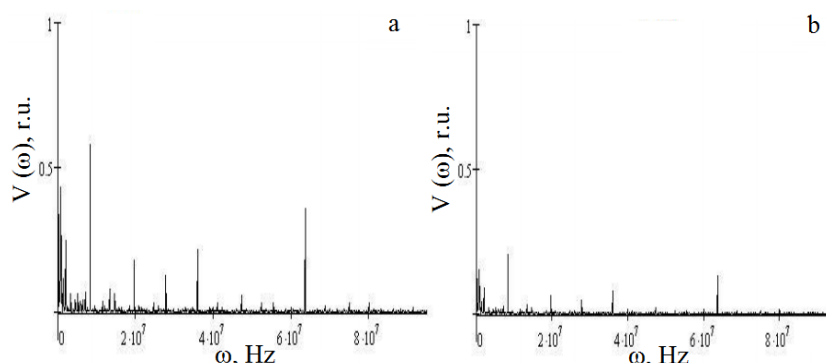


Figure 3.3. – Dependence of the photoacoustic signal from frequency modulation BLB<sub>1</sub> for different  $\rho$ : (a)  $\rho = 10^{-7}$  m; (b)  $\rho = 4 \cdot 10^{-7}$  m

For gyrotropic absorbing medium (Figure 3.2), one can see the notable difference in radial distribution of the heat dissipation

$$Q^{TE}(\rho) = Q_c^{TE}(\rho) - Q_u^{TE}(\rho),$$

it is related to the imaginary part of the gyrotropy parameter, which is responsible for circular dichroism, therefore, the increase parameter of gyrotropy  $\eta_2$  leads to growth in the absorbed energy of BLB.

The curve (Figure 3.3) shows that the amplitude of the photoacoustic response depends on the frequency of the amplitude modulation. As follows from the graphs (Figure 3.1), the maxima of amplitudes of PA signal are defined by the resonant properties of the system 'layered sample – piezoelectric transducer', namely by the relation of geometric parameters of the investigated sample and piezodetector, by the Murnaghan constants and Lamé coefficients.

### Conclusions

Thus, the following results were obtained in the paper:

1. The rate of change of energy dissipation under absorption of BLB in the double-layer gyrotropic medium was calculated. The dependence of the dissipation of TE mode of BLB on the radial coordinate and the value of the imaginary part of gyrotropy parameter were analyzed. It was graphically shown that the energy dissipation can change considerably under the change parameters of the gyrotropy.

2. The amplitude-phase characteristics of the PA signal, which occurs in the double-layer medium with internal stress, were defined taking into account the thermoelastic coupling coefficient. The dependence of the amplitude of the PA response on the modulation frequency and radial coordinate was graphically analyzed. The resonant increase in the amplitude of the PA signal for the frequencies  $\omega > 100$  KHz of the incident double-layer BLB sample was revealed. It was shown that the maxima of the amplitude of the PA signal correspond to the values of radial coordinates, near which the maxima of energy dissipation are localized.

3. There by, expression for amplitude of photoacoustic signal in mechanically stressed double layer was obtained with due regard to dependence of thermoelastic connection coefficient on initial deformation in sample. It should be noticed that experimental amplitude measurement of photoacoustic signal for different polarizing BLB will suggest (on the ground of obtained expressions) the method of definition of thermoelastic coupling coefficient as well as Murnaghan constants in crystal medium containing internal stress.

### REFERENCES

1. *Burbelo, R.M.* Photoacoustic effect in elastic stress' regions of solids / R.M. Burbelo, M.K. Zhabitenko // Progress in natural of science. – 1996. – Vol. 6. – P. 720–723.
2. *Burbelo, R.M.* Photothermoacoustic and photoelectric microscopy of silicon / R.M. Burbelo, M.K. Zhabitenko // Proc. 10<sup>th</sup> Inter. Conf. on Photoacoustic and Photothermal Phenomena. – Roma, 23–27 August, 1998. – P. 176–178.
3. *Бурбело, Р.М.* Импульсный фотоакустический метод определения упругого состояния твердых тел / Р.М. Бурбело, Н.К. Жабитенко // Вестник Киевского университета. – 1999. – Вып. 2. – С. 431–435.
4. *Муратиков, К.Л.* Теория генерации механических колебаний лазерным излучением в твердых телах с внутренними напряжениями на основе термоупругого эффекта / К.Л. Муратиков // ЖТФ. – 1999. – Т. 69, вып. 7. – С. 59–63.
5. *Aleksiejuk, M.* Investigation of resonance photoacoustic phenomena in solid mediums with internal stresses / M. Aleksiejuk, A.N. Emelyanovich, G.S. Mityurich // Ceramics. – 2011. – Vol. 61. – P. 85–91.
6. *Mityurich, G.S.* Modern photoacoustic spectroscopy problems. Theory and experiment / G.S. Mityurich, J.Motylewski, J.Ranachowski. – Warszawa: IFTR reports, Polish Academy Science, 1993. – 164 p.
7. *Bokut', B.V.* Determination of optical parameters of gyrotropic absorbing crystals by the photoacoustic method / B.V. Bokut', G.S. Mityurich //

Sov. Phys. Crystallogr. – 1987. – Vol. 32 (4). – P. 962.

8. *Thermo-optical Sound generation by Bessel light beams in nonlinear crystals* / G.S. Mityurich [et al.] // International Journal of Thermophysics. – 2011. – Vol. 32, № 4. – P. 844–851.

9. *Emelyanovich, A.N.* Photoacoustic method for investigation of the resonance phenomena in absorbing magnetoactive mediums with inner stresses / A.N. Emelyanovich, G.S. Mityurich, R.M. Burbello // Photoelectronics. – 2005. – Vol. 14. – P. 8–11.

10. *Photoacoustic diagnostics of inhomogeneous gyrotropic materials with internal stress using Bessel light beams* / G.S. Mityurich [et al.] // Archives of Metallurgy and Materials. – 2011. – Vol. 56 (4). – P. 1235–1242.

11. *Laser photoacoustic spectroscopy of the piezoceramic materials* / G.S. Mityurich [et al.] // Archives of Metallurgy and Materials. – 2009. – Vol. 54 (4). – P. 889–894.

12. *Durnin, J.* Exact solutions for nondiffracting beams. I. The scalar theory / J. Durnin // JOSA. – 1987. – Vol. 4, № 4. – P. 651–654.

13. *Belyi, V.N.* Frequency conversion of Bessel light beams in nonlinear crystals / V.N. Belyi, N.S. Kazak, N.A. Khilo // Quantum Electronics. – 2000. – Vol. 30 (9). – P. 753–766.

14. *Cizmar, T.* Tunable Bessel light modes: engineering the axial propagation / T. Cizmar, K. Dholakia // Opt. Express. – 2009. – Vol. 17 (18). – P. 15558–15570.

15. *Устройство термооптического возбуждения акустических волн*: пат. 5969и Респ. Беларусь, МПК (2009) G10K 11/00 / П.И. Ропот, Г.С. Митюрин; дата публ.: 28.02.2010.

16. *Фёдоров, Ф.И.* Теория гиротропии / Ф.И. Фёдоров. – Минск: Наука и техника, 1976. – 456 с.

*Поступила в редакцию 26.07.18.*